


Abmessungen Doppelflügel-Rückschlagklappen, Typ DC *Dimensions dual plate check valves, type DC*



Maße
Dimensions

DN	Inch	A	A	B	C	D	E
		PN10	PN16				
50	2"	107	107	65	43	28,8	19
65	2 1/2"	127	127	80	46	36,1	20
80	3"	142	142	94	64	43,4	28
100	4"	162	162	117	64	52,8	27
125	5"	192	192	145	70	65,7	30
150	6"	218	218	170	76	78,6	31
200	8"	273	273	224	89	104,4	33
250	10"	328	328	265	114	127,0	50
300	12"	378	378	310	114	148,3	43
350	14"	438	438	360	127	172,4	45
400	16"	489	489	410	140	197,4	52
450	18"	539	555	450	152	217,8	58
500	20"	594	594	505	152	241,0	58
600	24"	690	690	624	178	295,4	73

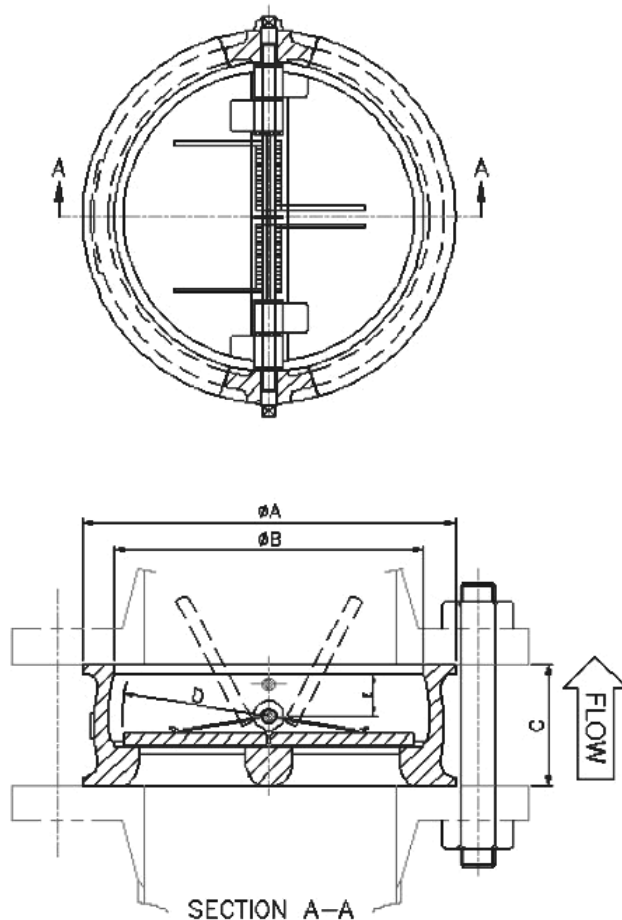

Werkstoffe Material


Gehäuse:	GGG-40, Edelstahl 1.4408
Body:	GGG-40, stainless steel 1.4408
Flügel:	GGG-40, Bronze C 954, Edelstahl 1.4408
Plate:	GGG-40, bronze C 954, stainless steel 1.4408
Welle:	Edelstahl 1.4301/1.4401
Stem:	stainless steel 1.4301/1.4401
Dichtungen (O-Ringe):	NBR, EPDM, FPM (Viton), metallisch <i>auf Anfrage</i>
Seals (O-rings):	NBR, EPDM, FPM (Viton), metal seated <i>on request</i>
Feder:	Edelstahl 1.4301/1.4408
Spring:	stainless steel 1.4301/1.4408

Max. Öffnungsdruck Maximum opening pressure

DN <mm>	Kv-Wert <m³/h>	<bar>
50	55	0,15
65	85	0,15
80	145	0,15
100	290	0,15
125	460	0,15
150	800	0,15
200	1.550	0,10
250	2.880	0,10
300	4.100	0,10
350	5.350	0,10
400	8.250	0,10
450	10.550	0,10
500	14.500	0,10
600	24.000	0,10



Druckverlustdiagramm *Pressure loss diagram*

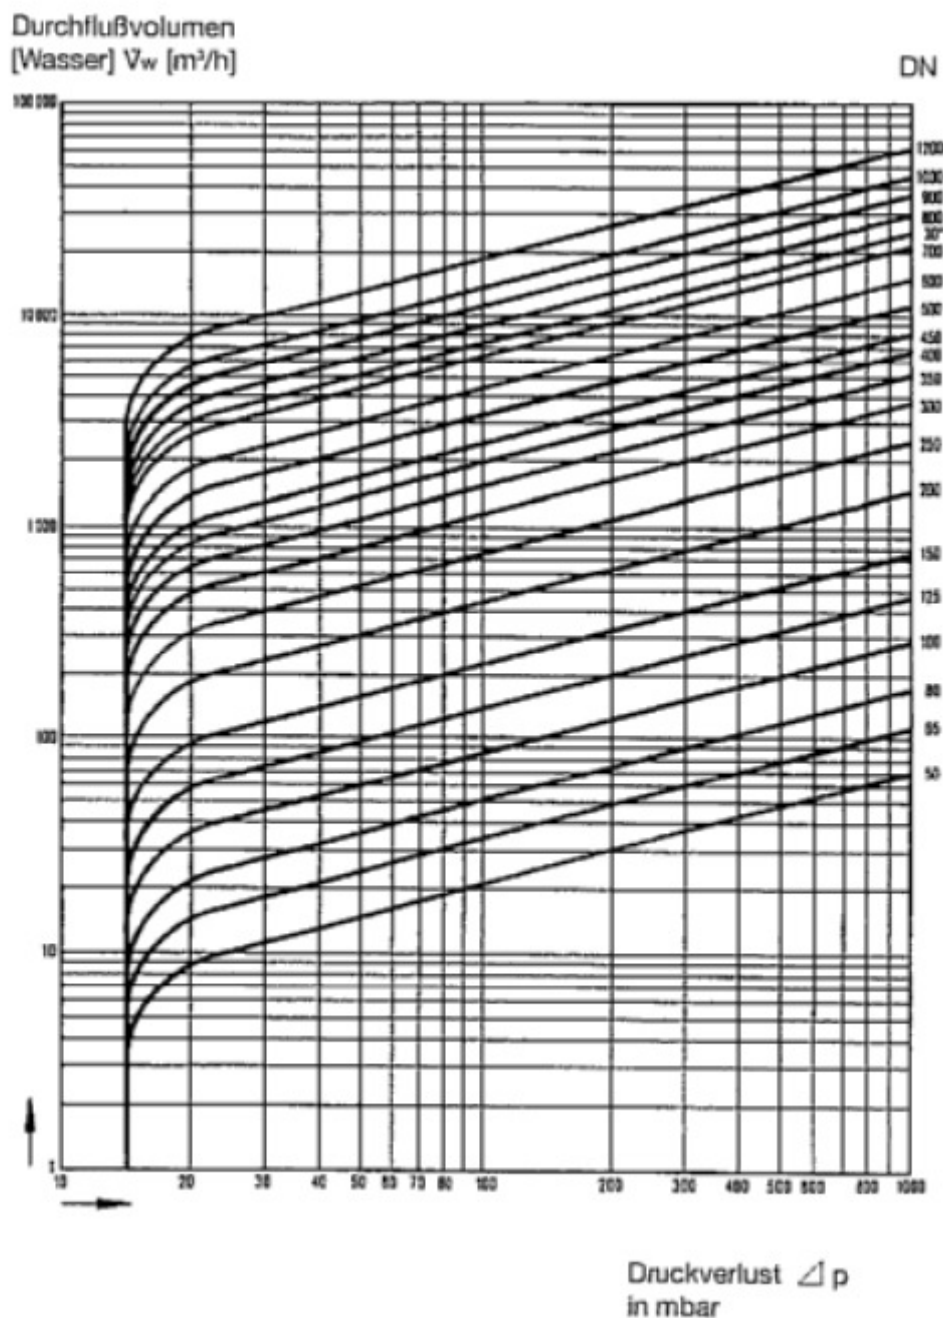

Master Distributor in China

Quko Int'l Development Limited

Email: sales@qukointl.com

Website: www.qukointl.com



Gewichte der Doppelflügel-Rückschlagklappen in <kg> *Weight of the dual plate check valves in <kg>*

DN	Gewicht
	<i>Weight</i>
<mm>	<kg>
50	1,5
65	2,4
80	3,6
100	5,7
125	7,3
150	9,0
200	17,0
250	26,0
300	42,0
350	55,0
400	75,0
450	101,0
500	111,0
600	172,0

