

Pressure-Reducing-Valve, springloaded

for steam, gases and liquids

Typ 71

Standard version:

Material: Valve-body / media contact surfaces

Typ 71.2: BG 0 - II 1.4301, 1.4571 / 1.4571

BG III - IV 1.4571 / 1.4571

Connections:

Flange connections: DIN EN / ASME B16.5

Sealings:

FPM, EPDM



PTFE, EPDM (steam up to 150°C)

PTFE, AF100, EPDM (steam up to 200°C)

Approvals:

Pressure Equipment Directive: 97/23/EG

Declaration of Conformity

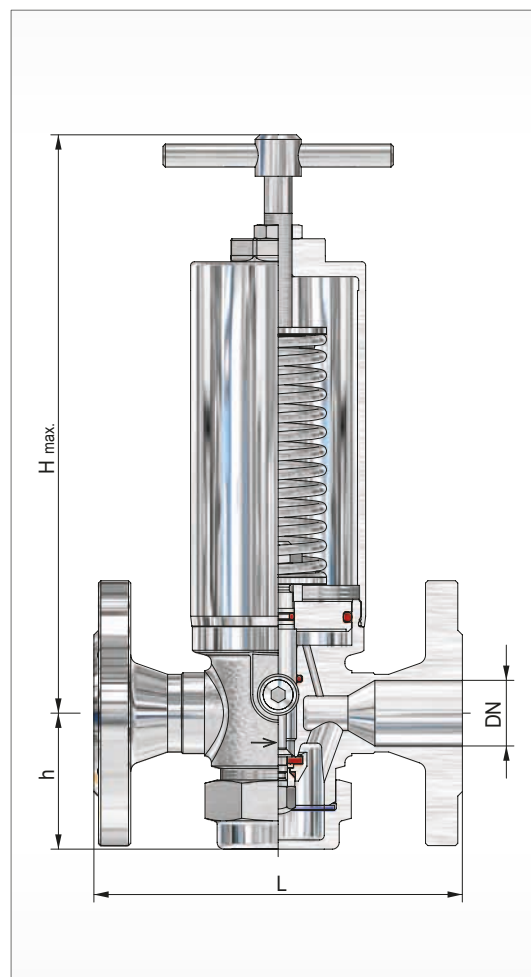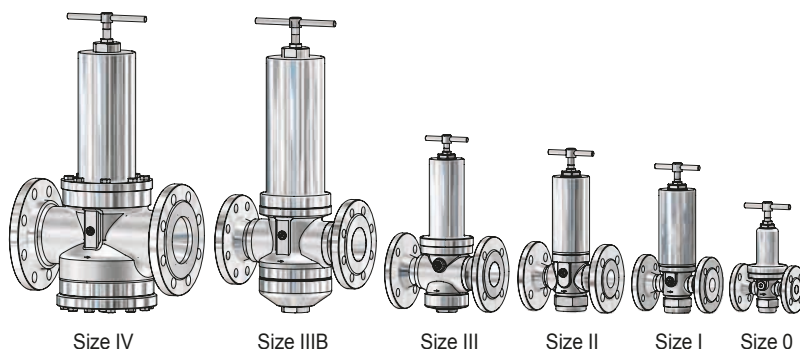

Size	Inlet			Outlet			Dimensions					Kvs value
	DN	NPS	Inlet pressure range P1 [bar(g)] max.	DN	NPS	Reduced pressure range P2 min. [bar(g)] max.	Height H max.		L [mm]	h [mm]	[m³/h]	
							Toggle spindle [mm]	Cap [mm]				
0	10 15	- ½	63	10 15	- ½	0,35 / 17,00	205	180	130		48	2,0 2,2
I	15 20 25*	½ ¾ 1*	100 63 63	15 20 25*	½ ¾ 1*	0,35 / 73,00	275	255	130 150 160		58	3,0 3,2 3,5
	25 32 40*	1 1 ¼ 1 ½*	63	25 32 40*	1 1 ¼ 1 ½*	0,25 / 23,00	305	265	160 180 200		68	6,3 6,5 6,7
	40 50 65*	1 ½ 2 2 ½*	63 40 40	40 50 65*	1 ½ 2 2 ½*	0,25 / 17,00	325	305	200 230 290		85	12,5 13,0 13,5
IIIB	50 65 80	2 2 ½ 3	40	50 65 80	2 2 ½ 3	0,25 / 12,00	545	495	300 290 310		145	27,5 28,0 28,5
	65 80 100	2 ½ 3 4	40	65 80 100	2 ½ 3 4	0,20 / 12,00	550	505	290 310 350		157	48,0 50,0 53,0

other design on request

* special size

Ni



Authorized Distributor
Quko Int'l Development Limited
 Unit B, 17/F, EGL Tower, 83 Hung To Road, Kwun Tong,
 Kowloon, Hong Kong, China
 Tel: (852) 2344 0201 Fax: (852) 2343 6078
 Email: sales@qukointl.com Website: www.qukointl.com


K 71
04 / 2014

GB


Pressure-Reducing-Valve, springloaded

for steam, gases and liquids


Typ 71



Cap
(Option: AC)

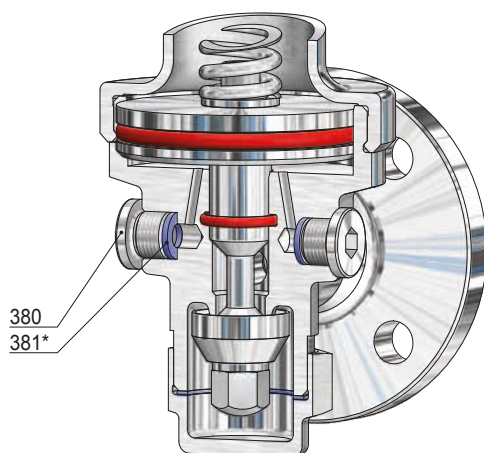

Manometer connection G 1/4

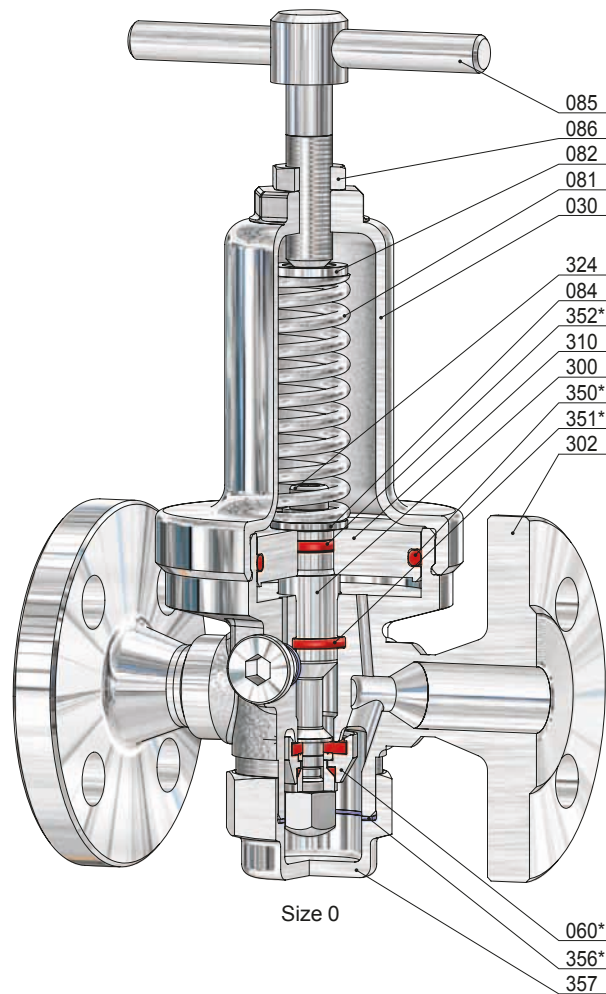

Size 0

Item	Piece	Description	Item	Piece	Description
302	1	valve body	086	1	lock nut
030	1	spring bonnet	120	1	cap
060 *	1	disc, complete	300	1	piston
560	1	disc	310	1	piston plate
061	1	pressure piece	324	1	screw
062	1	soft sealing	350 *	1	o-ring
065	1	disc bolt	351 *	1	o-ring
071	1	o-ring	352 *	1	o-ring
072	1	locking ring	356 *	1	sealing ring
073	1	o-ring <i>(only for thermoplastics soft sealing)</i>	357	1	bottom plug
081	1	spring	380	2	screw plug
082	1	springplate, upper	381 *	2	sealing ring
084	1	springplate, lower			
085	1	adjusting screw			

* expendable parts

Ni



Authorized Distributor
Quko Int'l Development Limited
 Unit B, 17/F, EGL Tower, 83 Hung To Road, Kwun Tong,
 Kowloon, Hong Kong, China
 Tel: (852) 2344 0201 Fax: (852) 2343 6078
 Email: sales@qukointl.com Website: www.qukointl.com


M 71-BG0
 04 / 2014

GB


Pressure-Reducing-Valve, springloaded

for steam, gases and liquids


Typ 71



Cap
(Option: AC)

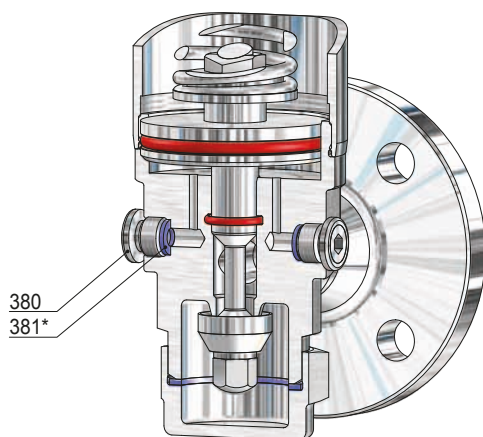

Manometer connection G 1/4

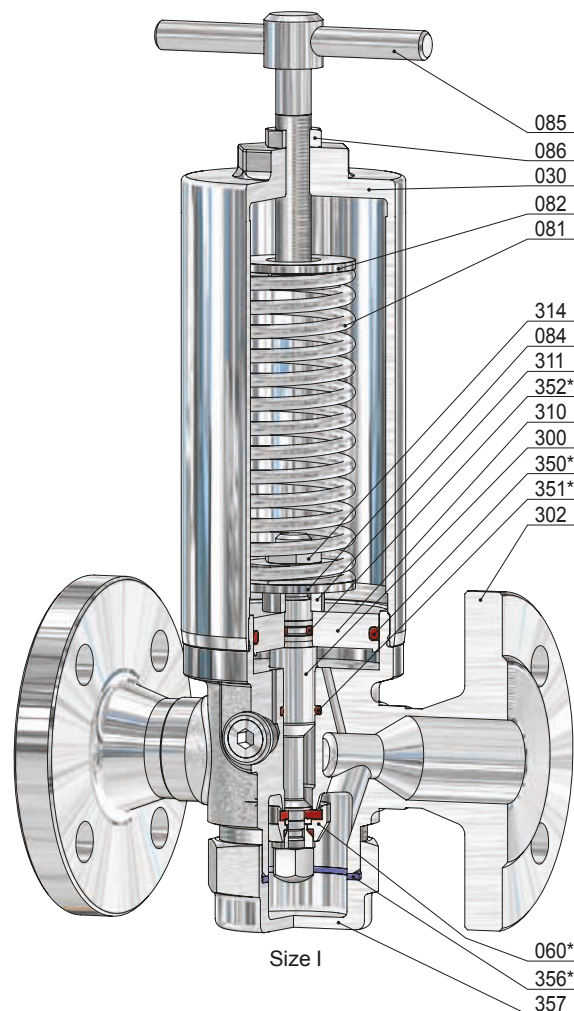

Size I

Item	Piece	Description	Item	Piece	Description
302	1	valve body	086	1	lock nut
030	1	spring bonnet	120	1	cap
060 *	1	disc, complete	300	1	piston
560	1	disc	310	1	piston plate
061	1	pressure piece	311	1	distance bush
062	1	soft sealing	314	1	lock nut
065	1	disc bolt	350 *	1	o-ring
071	1	o-ring	351 *	1	o-ring
072	1	locking ring	352 *	1	o-ring
073	1	o-ring (only for thermoplastics soft sealing)	356 *	1	sealing ring
081	1	spring	357	1	bottom plug
082	1	springplate, upper	380	2	screw plug
084	1	springplate, lower	381 *	2	sealing ring
085	1	adjusting screw			

* expendable parts

Ni



Authorized Distributor
Quko Int'l Development Limited
 Unit B, 17/F, EGL Tower, 83 Hung To Road, Kwun Tong,
 Kowloon, Hong Kong, China
 Tel: (852) 2344 0201 Fax: (852) 2343 6078
 Email: sales@qukointl.com Website: www.qukointl.com


M 71-BGI
 04 / 2014

GB


Pressure-Reducing-Valve, springloaded

for steam, gases and liquids


Typ 71



Cap
(Option: AC)

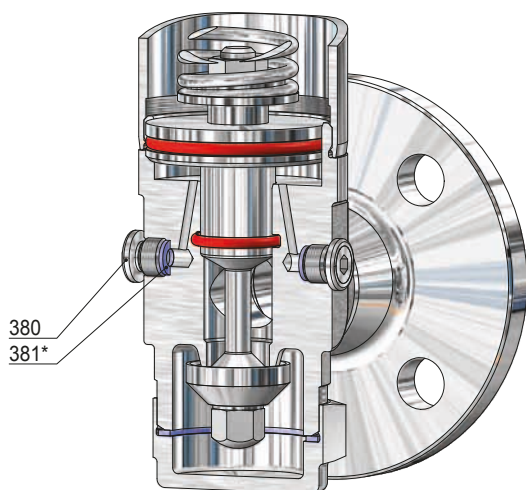

Manometer connection G 1/4

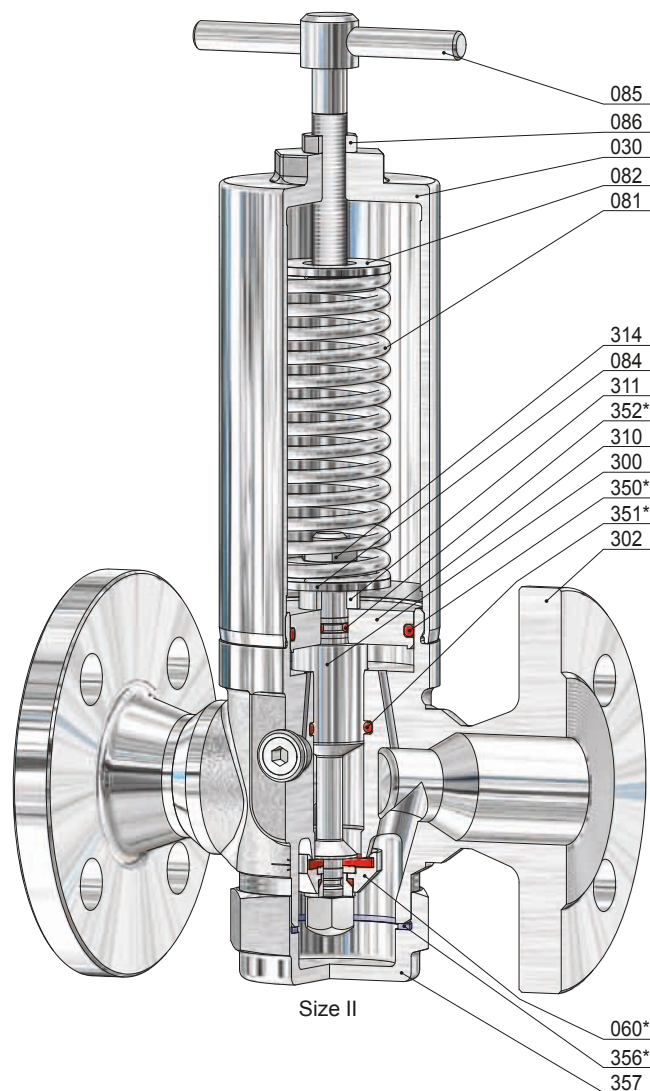

Size II

Item	Piece	Description	Item	Piece	Description
302	1	valve body	086	1	lock nut
030	1	spring bonnet	120	1	cap
060 *	1	disc, complete	300	1	piston
560	1	disc	310	1	piston plate
061	1	pressure piece	311	1	distance bush
062	1	soft sealing	314	1	lock nut
065	1	disc bolt	350 *	1	o-ring
071	1	o-ring	351 *	1	o-ring
072	1	locking ring	352 *	1	o-ring
073	1	o-ring <i>(only for thermoplastics soft sealing)</i>	356 *	1	sealing ring
081	1	spring	357	1	bottom plug
082	1	springplate, upper	380	2	screw plug
084	1	springplate, lower	381 *	2	sealing ring
085	1	adjusting screw			

* expendable parts

Ni



Authorized Distributor
Quko Int'l Development Limited
 Unit B, 17/F, EGL Tower, 83 Hung To Road, Kwun Tong,
 Kowloon, Hong Kong, China
 Tel: (852) 2344 0201 Fax: (852) 2343 6078
 Email: sales@qukointl.com Website: www.qukointl.com


M 71-BGII
 04 / 2014

GB


Pressure-Reducing-Valve, springloaded

for steam, gases and liquids


Typ 71



Cap
(Option: AC)

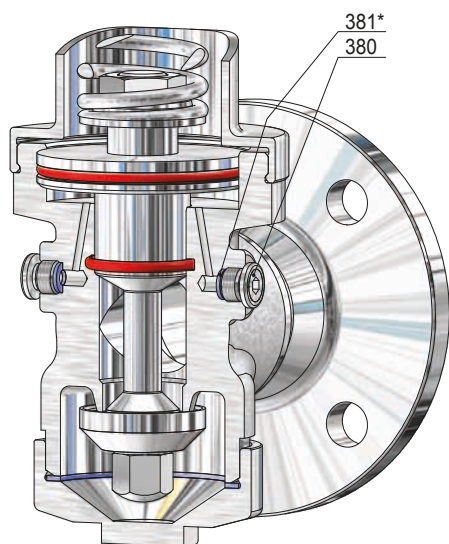

Manometer connection G 1/4

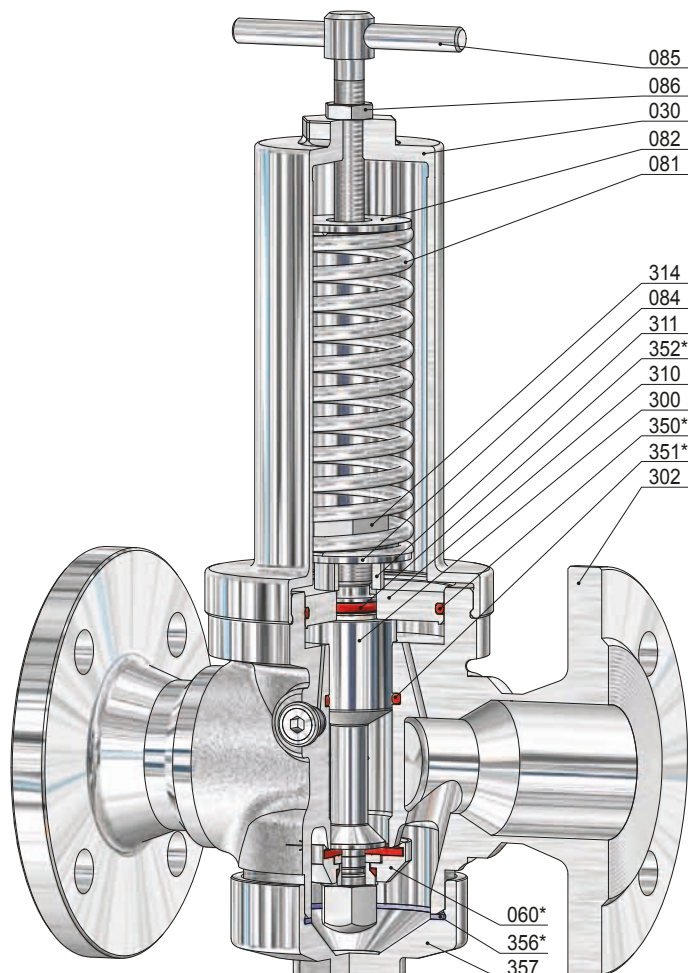

Size III

Item	Piece	Description	Item	Piece	Description
302	1	valve body	086	1	lock nut
030	1	spring bonnet	120	1	cap
060 *	1	disc, complete	300	1	piston
560	1	disc	310	1	piston plate
061	1	pressure piece	311	1	distance bush
062	1	soft sealing	314	1	lock nut
065	1	disc bolt	350 *	1	o-ring
071	1	o-ring	351 *	1	o-ring
072	1	locking ring	352 *	1	o-ring
073	1	o-ring (only for thermoplastics soft sealing)	356 *	1	sealing ring
081	1	spring	357	1	bottom plug
082	1	springplate, upper	380	2	screw plug
084	1	springplate, lower	381 *	2	sealing ring
085	1	adjusting screw			

* expendable parts

Ni



Authorized Distributor
Quko Int'l Development Limited
 Unit B, 17/F, EGL Tower, 83 Hung To Road, Kwun Tong,
 Kowloon, Hong Kong, China
 Tel: (852) 2344 0201 Fax: (852) 2343 6078
 Email: sales@qukointl.com Website: www.qukointl.com



M 71-BGIII
 04 / 2014

GB


Pressure-Reducing-Valve, springloaded

for steam, gases and liquids

Typ 71

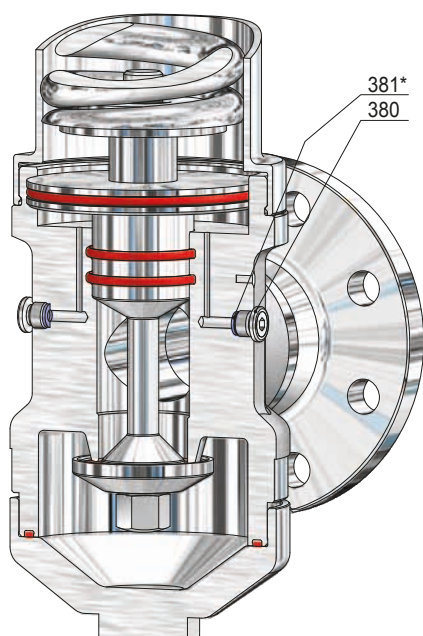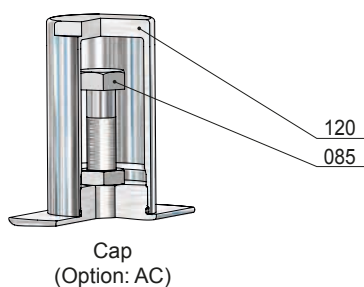

Manometer connection G 1/4

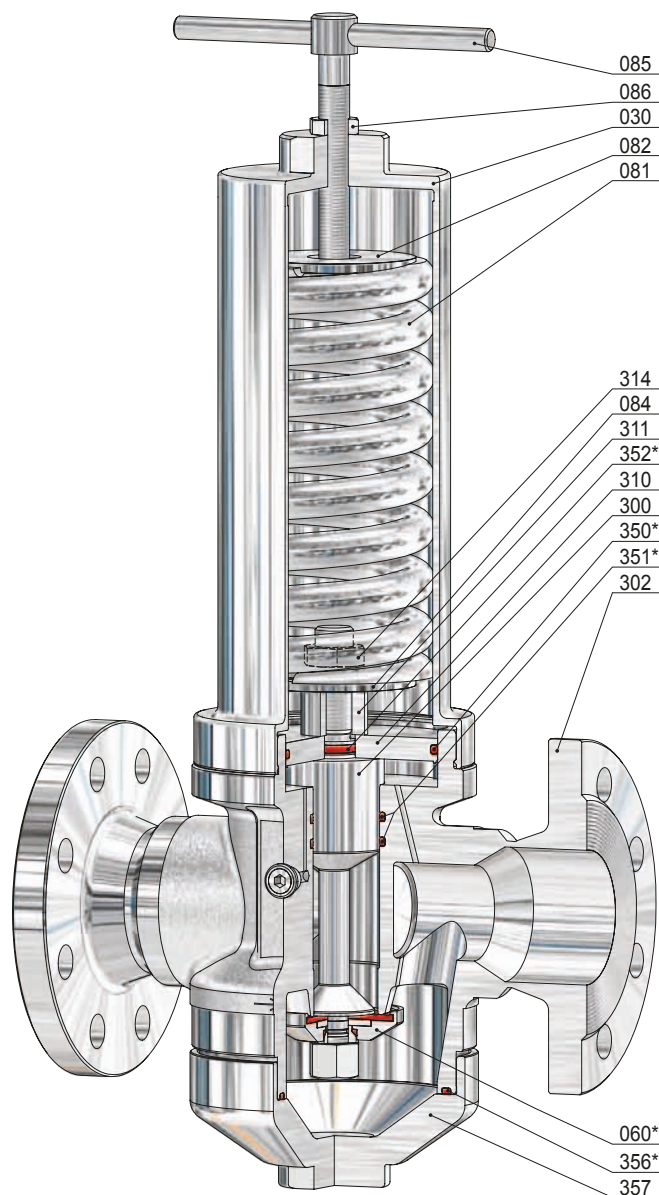

Size IIIB

Item	Piece	Description	Item	Piece	Description
302	1	valve body	086	1	lock nut
030	1	spring bonnet	120	1	cap
060 *	1	disc, complete	300	1	piston
560	1	disc	310	1	piston plate
061	1	pressure piece	311	1	distance bush
062	1	soft sealing	314	1	lock nut
065	1	disc bolt	350 *	1	o-ring
071	1	o-ring	351 *	2	o-ring
072	1	locking ring	352 *	1	o-ring
073	1	o-ring (only for thermoplastics soft sealing)	356 *	1	sealing ring
081	1	spring	357	1	bottom plug
082	1	springplate, upper	380	2	screw plug
084	1	springplate, lower	381 *	2	sealing ring
085	1	adjusting screw			

* expendable parts

Ni



Authorized Distributor
Quko Int'l Development Limited
 Unit B, 17/F, EGL Tower, 83 Hung To Road, Kwun Tong,
 Kowloon, Hong Kong, China
 Tel: (852) 2344 0201 Fax: (852) 2343 6078
 Email: sales@qukointl.com Website: www.qukointl.com


M 71-BGIIIB
 04 / 2014

GB


Pressure-Reducing-Valve, springloaded

for steam, gases and liquids


Typ 71

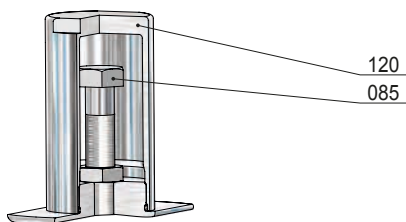

Cap
(Option: AC)

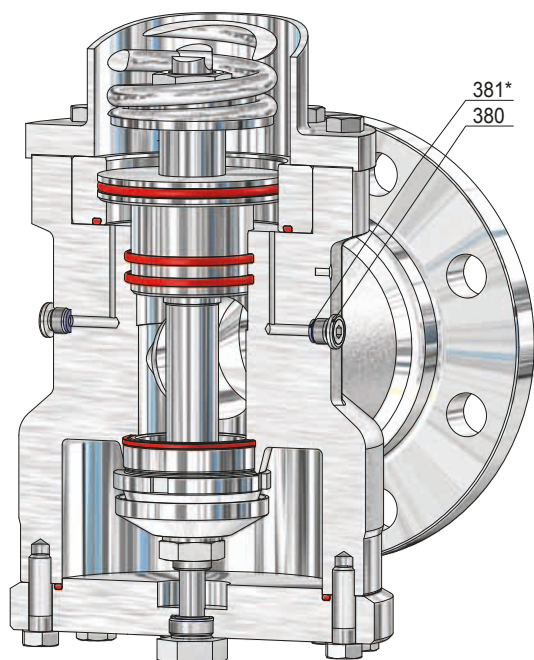

Manometer connection G 1/4

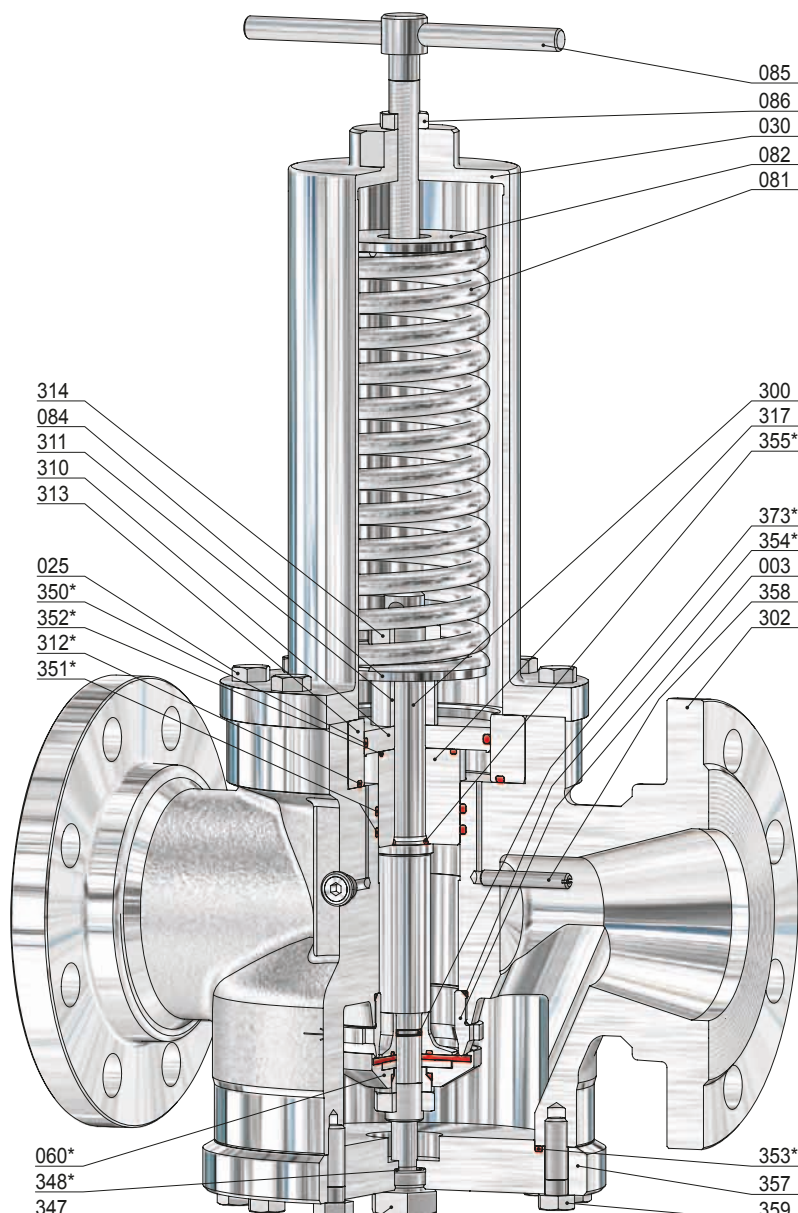

Size IV

Item	Piece	Description	Item	Piece	Description	Item	Piece	Description
302	1	valve body	082	1	springplate, upper	350 *	1	o-ring
003	1	seat	084	1	springplate, lower	351 *	2	o-ring
025	8	screw	085	1	adjusting screw	352 *	1	o-ring
030	1	spring bonnet	086	1	lock nut	353 *	1	o-ring
060 *	1	disc, complete	120	1	cap	354 *	1	o-ring
560	1	disc	300	1	piston	355 *	1	o-ring
061	1	pressure piece	310	1	piston plate	357	1	bottom plug
062	1	soft sealing	311	1	distance bush	358	1	suction tube
065	1	disc bolt	312 *	1	o-ring	359	12	screw
071	1	o-ring	313	1	piston plate ring	373 *	1	o-ring
072	1	locking ring	314	2	lock nut	380	2	screw plug
073	1	o-ring	317	1	piston guide	381 *	2	sealing ring
074	1	disc plate	347	1	screw			
081	1	spring	348 *	1	o-ring			

* expendable parts

Ni



Authorized Distributor
Quko Int'l Development Limited
Unit B, 17/F, EGL Tower, 83 Hung To Road, Kwun Tong,
Kowloon, Hong Kong, China
Tel: (852) 2344 0201 Fax: (852) 2343 6078
Email: sales@qukointl.com Website: www.qukointl.com

M 71-BGIV
04 / 2014

GB